

NEW

新商品

GAS SPRINGS -FREE ATTACHING DIRECTION TYPE-



氮氣缸

—安裝方向自由型—



RoHS10

GSKSF

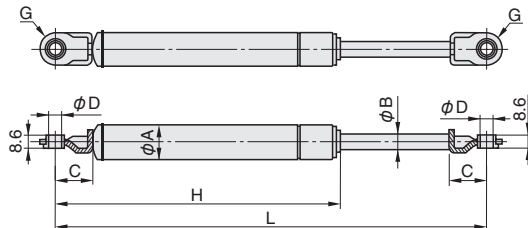

Ⓢ使用溫度：-20~60℃

零件	材質	表面處理
氣壓缸	STKM11A	烤漆(黑色)
桿	S20C	氣體軟氮化處理
襯套	聚甲基POM(白)	-
氣體	氮氣(N ₂)	-

Type	No.	最大長度 Lmax	最小長度 Lmin	行程	氮氣反作用力(20℃)					A	B	C	D	G	H	適用安裝 支撐架	重量 (g)	NTS 基準單價																																																							
					Lmax-10mm 行程時		Lmax-(S) mm 行程時																																																																		
					N	kgf	N	kgf	(S)																																																																
GSKSF	14050-30	181	131	50	27	2.8	35	3.6	40	14	7	15	6.5	R8	110	GSSB6A	83																																																								
	14050-90				85	8.7	109	11.1									82																																																								
	14050-150				147	15.0	189	19.3									82																																																								
	14050-190				186	19.0	239	24.4									82																																																								
	14050-210				206	21.0	264	26.9									83																																																								
	14070-90	221	151	70	81	8.3	109	11.1	60						94																																																										
	14070-105				104	10.6	124	12.6	41.5						94																																																										
	14070-110				107	10.9	144	14.7	119																																																																
	14070-200	221	151	90	196	20.0	258	26.3	60						130		130	96																																																							
	14090-70	261	171	90	69	7.0	95	9.7	80						18		8	6.5	R8	150	GSSB6A	109																																																			
	14090-80				79	8.1	109	11.1														108																																																			
	14090-90				88	9.0	122	12.4														109																																																			
	14090-150				147	15.0	203	20.7														108																																																			
	14090-200				196	20.0	271	27.6														107																																																			
	14100-80	281	181	100	76	7.8	106	10.8	90											22		10	8.5	R10	160	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	114																																														
	14100-110				110	11.2	153	15.6				112																																																													
	14100-200				196	20.0	273	27.8				113																																																													
	18090-270	261	171	90	263	26.8	332	33.9	80			25.4															12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	141																																									
	18100-330	281	181	100	324	33.0	411	41.9	90																							25.4	12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	149																																			
	18110-220	380	270	110	214	21.8	272	27.7	100																25.4													12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	200																														
	18150-270	475	325	150	267	27.2	348	35.5	140																																		25.4	12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	252																								
	18150-380	374	265	147	374	38.1	487	49.7	140																																								25.4	12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	252																		
	22080-200	279	199	80	196	20.0	233	23.8	70																					25.4																									12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	212													
	22080-250	246	25.1	292	29.8	215																																																																			
	22096-400	306	210	96	392	40.0	477	48.7	86									25.4																		12.5					20																			R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	230										
	22100-430	375	275	100	427	43.6	484	49.4	90																																						25.4																12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	267					
	22142-310	472	330	142	304	31.0	348	35.5	125																																												25.4															12.5	20	R10	374.5	GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E	322
	22147-150	147	15.0	181	18.5	289																																																																			
	22147-240	240	24.5	295	30.1	130	236	290																																																																	
	22150-350	464	314	150	343	35.0	406	41.4	140														25.4																																			12.5			20												R10
22200-490	481	49.1	624	63.6	424																																																																				
22200-540	600	400	200	534	54.5	693	70.7	190	25.4	12.5	20		R10	374.5		GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E																																																		424							
22235-150	141	14.4	177	18.1	386																																																																				
22235-250	248	25.3	311	31.7	387																																																																				
22235-350	343	35.0	431	44.0	385																																																																				
22235-510	507	51.7	637	65.0	389																																																																				
22243-220	214	21.8	273	27.8	424																																																																				
22243-480	472	48.1	603	61.5	215	355	424																																																																		
22270-380	374	38.1	464	47.3	437																																																																				
22270-560	553	56.4	686	70.0	240	371	441																																																																		
22356-220	833	476.5	356.5	216	22.0	280	28.6	350						25.4	12.5		20		R10		374.5							GSSB8A GSSB8B GSSB8C GSSB8D GSSB8E						525																																							
22356-350	345	35.2	447	45.6	527																																																																				
26300-820	812	82.8	1100	112.2	275	661																																																																			
26300-930	927	94.6	1256	128.1	275	665																																																																			

37 彈簧・緩衝器
氮氣缸



Order 訂購範例

型式

GSKSF14050-150



Delivery 出貨日

3 天出貨

數量區分	標準訂購	特殊訂購
數量	少量 1~50	大量 51~
出貨日	一般	交期另估

Ⓢ超過表中最大數量時交期另估。☎P5

詢價 請依下列2種方式

24 WEB系統 FAX

☎ P.9 請電洽: 02-2570-3766#0