


小徑滾珠軸承

—兩側密封式—

CAD資料夾名稱：14_Bearings_with_Holder

建議於需要高荷重、高轉速、高旋轉精密度時使用。同一產品的C-VALUE商品請參閱右頁P.1018

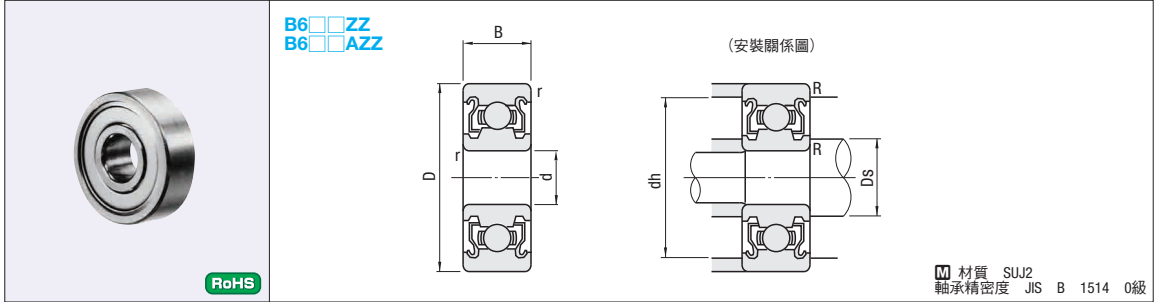

技術資料的徑向軸承(等級0級)的容許公差及容許值可以參考。P.2243

型式	d	D	B	r (min)	基本額定荷重		容許轉速 rpm (參考)	安裝相關尺寸			質量 (g) (參考)	NT\$基準單價
					Cr(動態) N	Cor(靜態) N		Ds (min)	dh (max)	R (max)		
B682ZZ	2	5	2.3	0.08	169	50	85000	2.7	3.9	0.08	0.17	
B692ZZ		6	3.0	0.15	330	98	75000	3.0	4.8	0.15	0.38	
B602ZZ		7	3.5		385	127	60000	3.2	5.8		0.58	
B682AZZ	2.5	6	2.6	0.08	208	74	71000	3.7	4.9	0.08	0.29	
B692AZZ		7	3.5	0.15	385	127	63000	3.85	5.65	0.15	0.55	
B673ZZ	3	6	2.5	0.1	208	74	71000	3.6	5.4	0.08	0.2	
B683ZZ		7	3		390	130	63000	3.9	5.8	0.1	0.45	
B693ZZ		8	4	0.15	560	179	60000	4.2	6.8	0.15	0.83	
B603ZZ		9	5		570	187	56000		7.8		1.45	
B623ZZ		10	4		630	218	50000		8.8		1.66	
B633ZZ	4	13	5	0.2	1300	485	40000	4.6	11.4	0.2	3.33	
B674ZZ		7	2.5	222	88	60000	6.4		0.08	0.29		
B684ZZ		9	4	0.1	640	224	53000	5.0	7.8	0.1	1.01	
B694ZZ		11			0.15	715	276	48000	5.2	9.8	0.15	1.75
B604ZZ		12		0.2		957	350		5.6	10.4	0.2	2.29
B624ZZ		13	5		1300	485	40000	11.4		3.04		
B634ZZ	16	0.3		1340	523	36000	6	14	0.3	5.21		
B675ZZ	5	8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34	
B685ZZ		11	5	0.15	715	281	45000	6.2	9.8	0.2	1.96	
B695ZZ		13	4	0.2	1080	430	43000	6.6	11.4		2.5	
B605ZZ		14	5		1330	505	40000		12.4		3.48	
B625ZZ		16	0.3	1730	670	36000	7	14	0.3	4.86		
B635ZZ		19		6	2336	835		32000		17	8.34	
B676ZZ	6	10	3	0.1	495	218	45000	7.04	9.3	0.1	0.68	
B686ZZ		13	5	0.15	1080	440	40000	7.0	11.8	0.15	2.69	
B696ZZ		15		0.2	1350	530		7.6	13.4	0.2	3.72	
B606ZZ		17	6	0.3	2190	835	38000	8	15	0.3	6.08	
B626ZZ		19			2340	885	32000		17		7.94	
B636ZZ		22	7		3333	1423	30000		20		14.5	
B678ZZ	8	12	3.5	0.1	543	274	40000	9.05	11.33	0.1	0.97	
B688ZZ		16	5	0.2	1610	710	36000	9.6	14.4	0.2	4.02	
B698ZZ		19	6	0.3	1990	865			34000		17	0.3
B608ZZ		22	7		3350	1400	20	12				
B628ZZ		24	8		4000	1590	28000	22		17		
B638ZZ		28	9		4563	1983		26	30.3			

kgf=N×0.101972




小徑滾珠軸承

—兩側密封式—

CAD資料夾名稱：14_Bearings_with_Holder 類似商品頁 P.1017

類似產品比較要點 | 為用於輕荷重、中低轉速、中精密密度旋轉的產品。C-VALUE的商品說明請參閱P.1015

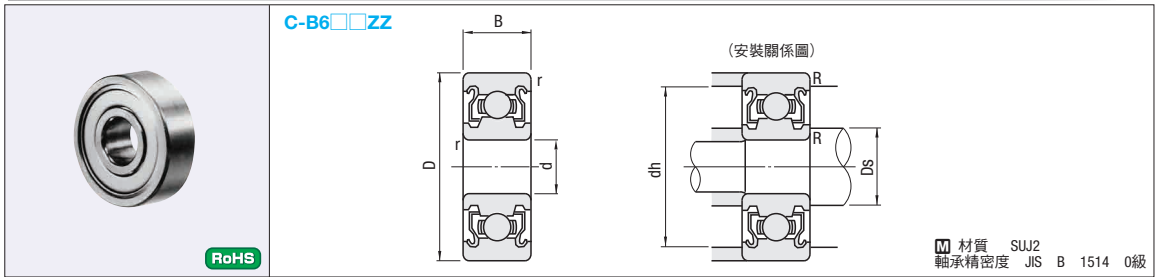

技術資料的徑向軸承(等級0級)的容許公差及容許值可以參考。P.2243

型式	d	D	B	r (min)	C-VALUE零組件確認重點① 基本額定荷重		容許轉速 rpm (參考)	安裝相關尺寸			質量 (g) (參考)	NT\$基準單價	
					Cr(動態) N	Cor(靜態) N		Ds (min)	dh (max)	R (max)			
C-B682ZZ	2	5	2.3	0.08	146	52	85000	2.7	3.9	0.08	0.17		
C-B692ZZ			6	3	0.15	270	90	75000	3	4.8	0.15	0.38	
C-B673ZZ			6	2.5	0.1	146	52	71000	3.6	5.4	0.08	0.2	
C-B683ZZ	3	7	3	0.1	273	91	63000	3.9	5.8	0.1	0.45		
C-B693ZZ			8	4	0.15	392	125	60000	4.2	6.8	0.15	0.83	
C-B693ZZ			9	5	0.15	400	132	56000		7.8		1.45	
C-B623ZZ		10	4	441		153	50000	8.8		1.66			
C-B674ZZ	4	7	2.5	0.1	155	62	60000	4.6	6.4	0.08	0.29		
C-B684ZZ			9	4	0.1	448	157	53000	5	7.8	0.1	1.01	
C-B694ZZ			11		0.15	501	193	48000	5.2	9.8	0.15	1.75	
C-B604ZZ			12		0.2	670	245		5.6	10.4	0.2	2.29	
C-B624ZZ			13	5		910	340	40000		11.4		3.04	
C-B634ZZ			16		0.3	938	366	36000	6	14	0.3	5.21	
C-B675ZZ	5	8	2.5	0.1	153	92	53000	5.8	7.4	0.1	0.34		
C-B685ZZ			11	5	0.15	501	197	45000	6.2	9.8	0.2	1.96	
C-B695ZZ			13	4	0.2	756	301	43000	6.6	11.4		2.5	
C-B605ZZ			14	5		931	354	40000		12.4		3.48	
C-B625ZZ			16	0.3	1211	469	36000	7	14	0.3	4.86		
C-B635ZZ			19		6	1635	627		32000		17	8.34	
C-B676ZZ	6	10	3	0.1	347	153	45000	7.04	9.3	0.1	0.68		
C-B686ZZ			13	5	0.15	756	308	40000	7	11.8	0.2	2.69	
C-B696ZZ			15		0.2	945	371		7.6	13.4		3.72	
C-B606ZZ			17	6	0.3	1533	585	38000	8	15	0.3	6.08	
C-B626ZZ		19	1638			620	32000	17		7.94			
C-B678ZZ	8	12	3.5	0.1	380	192	40000	9.05	11.33	0.1	0.97		
C-B688ZZ			16	5	0.2	1127	497	36000	9.6	14.4	0.2	4.02	
C-B698ZZ			19	6	0.3	1393	606			10		17	0.3
C-B608ZZ			22	7		2345	980	34000	20		12		
C-B628ZZ			24	8		2800	1113	28000	22		17		
C-B638ZZ			28	9		3194	1388		26		30.3		

kgf=N×0.101972

C-VALUE零組件確認重點②

內徑d (mm)		MISUMI高精度商品間隙 (μm)		C-VALUE商品間隙 (μm)	
超過	以下	最小	最大	最小	最大
未滿10		5	10	7	15

＜使用C-VALUE商品的注意事項＞

- 此產品為C-VALUE商品。C-VALUE的商品詳細說明請見P.1015 同一產品的MISUMI高精度商品請參閱左頁P.1017
- 為用於輕荷重、中低轉速、中精密密度旋轉的產品。
 - 請在仔細確認C-VALUE商品確認重點①、②後使用。
 - 內部間隙量及額定荷重與MISUMI高精度商品有所不同。
 - 請勿使用在高度荷重、高速旋轉、高旋轉精密度的部位。

