


圓線彈簧

—外徑基準不鏽鋼型—



請依照選定步驟1~3選擇型式和數值後再行訂購。

Order 訂購範例 型式 (1)Type (2)D (3)L UL16 - 80

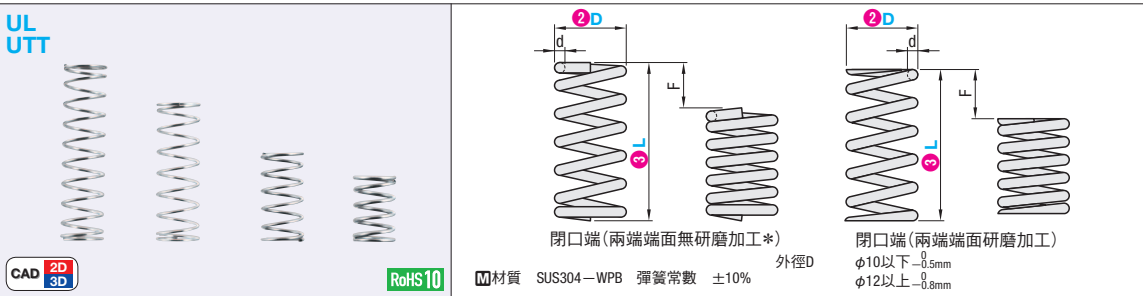

UL : Fmax. (容許壓縮量) = L x 40%

Table of UL spring specifications including Type, d, Fmax, and N{kgf} max.

Table of UTT spring specifications including Type, d, Fmax, and N{kgf} max.

Table of UTT spring specifications including Type, d, Fmax, and N{kgf} max.

Alterations and Spec. table for UL and UTT types, including LKC and LUC codes.

UTT : Fmax. (容許壓縮量) = L x Fa%

Table of UTT spring specifications including Type, d, Fmax, and N{kgf} Max.

Table of UTT spring specifications including Type, d, Fmax, and N{kgf} Max.

Table of UTT spring specifications including Type, d, Fmax, and N{kgf} Max.

kgf (荷重) = N/mm (彈簧常數) x 0.101972 x F (壓縮量) (kgf) = N x 0.101972

- List of notes regarding spring specifications, including material, length, and usage.

彈簧常數

Table of spring constants for various types (UV, UY, UR, UF, UL, UTT, UM, UH, UBB).

Delivery and Alteration options, including inventory status and lead times.

Quantity and pricing table with columns for quantity and price.

詢價 (Price Inquiry) section with contact information and a search bar.

Alterations and Spec. table for LKC and LUC types, including spring constant specifications.