



代表型號：C-HTPA30H3M090-A-N10


211 2個起訂 元/個
190 50個起 元/個

大訂單再享 9折

數量	折扣	出貨日
2~29	—	5日
30~49	—	另詢
50~	9折	另詢

若超過以上訂購數量，交期另外洽詢。實際出貨日與價格以「訂購」時報價單中的內容為準。

■鍵槽尺寸

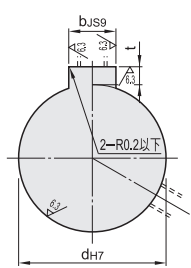

N: 新JIS (B1301) 鍵槽尺寸表

No.	dh7	bJS9	t公差
N 8	8 +0.015	3 ±0.0125	1.4 +0.1
N10	10 0	4 ±0.0150	1.8 0
N12	12 +0.018	4 ±0.0150	1.8 0
N14	14 0	5 ±0.0150	2.3 0


攻牙孔尺寸表 (軸孔規格: P · N)

dh7軸孔內徑	M (粗螺牙)
5	M3
6~14	M4

種類 · 寬度No.

對應皮帶	皮帶輪形狀	A	W	L
H3M060	A	7	11	19
	B	—	—	—
	K	—	—	—
H3M090	A	11	15	23
	B	—	—	—
	K	—	—	—
H3M120	A	14	18	26
	B	—	—	—
	K	—	—	—
H3M150	A	17	21	29
	B	—	—	—
	K	—	—	—

■皮帶輪形狀

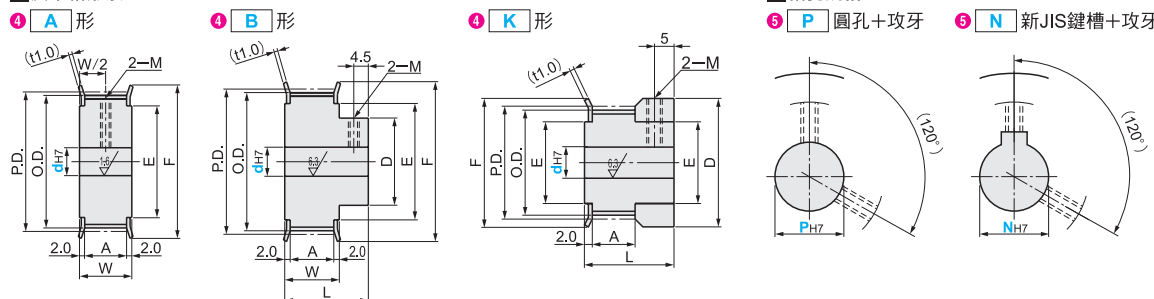

A形皮帶輪攻牙孔在120°附近避開齒尖

鍵槽與齒的位置不固定

固定螺絲詳細規格請參照網頁

材質 皮帶輪：鋁合金

法蘭：鋁合金

表面處理 白色陽極處理

型式	1 Type	2 齒數	3 對應皮帶	4 皮帶輪形狀	5 軸孔規格 P 孔徑 d	P.D.	O.D.	F	E
C-HTPA	A	18	H3M060	A	5	17.19	16.43	20	13
			H3M090		5 · 6				
			H3M120		5				
			H3M150		5				
		20	H3M060		5 · 6				
			H3M090		5 · 6				
			H3M120		6				
			H3M150		6				
		22	H3M060		6 · 8				
			H3M090		5 · 6 · 6.35 · 8				
			H3M120		6 · 8				
			H3M150		6 · 8				
	24	H3M060	5 · 6 · 8 · 10						
		H3M090	5 · 6 · 8 · 10						
		H3M120	6 · 8 · 10						
		H3M150	6 · 8 · 10						
	25	H3M060	8 · 10						
		H3M090	8 · 10						
		H3M120	8 · 10						
		H3M150	10						
	28	H3M060	8 · 10						
		H3M090	8 · 10						
		H3M120	8 · 10						
		H3M150	10						
30	H3M090	8 · 10 · 14							
	H3M120	8 · 10 · 14							
	H3M150	10							
	H3M090	8 · 10 · 14							
32	H3M120	8 · 10 · 14							
	H3M150	10							
	H3M090	8 · 10							
	H3M120	8 · 10							
36	H3M120	8 · 10							
	H3M150	10							
	H3M090	8 · 10							
	H3M120	8 · 10							

詳細販售型號及規格請以MISUMI官網為準。

型式	1 Type	2 齒數	3 對應皮帶	4 皮帶輪形狀	5 軸孔規格 P 孔徑 d	P.D.	O.D.	F	E
C-HTPA	25	28	H3M060	A	8 · 10	23.87	23.11	28	18
			H3M090		8 · 10				
			H3M120		8 · 10				
			H3M150		10				
	28	30	H3M060		8 · 10				
			H3M090		8 · 10				
			H3M120		8 · 10				
			H3M150		10				
	30	32	H3M090		8 · 10 · 14				
			H3M120		8 · 10 · 14				
			H3M150		10 · 14				
			H3M090		8 · 10 · 14				
32	36	H3M120	8 · 10 · 14						
		H3M150	10 · 14						
		H3M090	8 · 10 · 12 · 14						
		H3M120	8 · 10 · 12 · 14						

型式	1 Type	2 齒數	3 對應皮帶	4 皮帶輪形狀	5 軸孔規格 P 孔徑 d	P.D.	O.D.	D	F	E	
C-HTPA	B	24	H3M060	B	6 · 8	22.92	22.16	14	25	16	
			H3M090		6 · 8						
			H3M120		6 · 8						
			H3M150		6 · 8						
		25	15		H3M060						8 · 10
					H3M090						8 · 10
					H3M120						8 · 10
					H3M150						8 · 10
		28	16		H3M060						8 · 10
					H3M090						8 · 10
					H3M120						8 · 10
					H3M150						8 · 10
	30	18	H3M060	8 · 10							
			H3M090	8 · 10							
			H3M120	8 · 10							
			H3M150	8 · 10							
	32	20	H3M090	8 · 10							
			H3M120	8 · 10							
			H3M150	8 · 10							
			H3M090	8 · 10							
	36	22	H3M120	8 · 10							
			H3M150	8 · 10							
			H3M090	8 · 10							
			H3M120	8 · 10							

Order 訂購範例 請依照選定步驟1~5選擇型式和數值後再行訂購。

型式 (1 Type · 2 齒數 · 3 對應皮帶) - 4 皮帶輪形狀 - 5 軸孔規格 · 孔徑 (P/N)
C-HTPA30H3M090 - A - N10

型式	1 Type	2 齒數	3 種類 · 寬度No.	4 皮帶輪形狀	5 軸孔規格 P 孔徑 d	P.D.	O.D.	D	F	E
C-HTPA	28	30	H3M120	B	8	26.74	25.98	18	30	20
			H3M150		8					
			H3M120		8					
			H3M150		8					
	32	32	H3M090		10					
			H3M120		8 · 10					
			H3M150		10					
			H3M090		8 · 10					
	36	36	H3M120		8 · 10					
			H3M150		10					
			H3M090		8 · 10					
			H3M120		8 · 10					

型式	1 Type	2 齒數	3 種類 · 寬度No.	4 皮帶輪形狀	5 軸孔規格 P 孔徑 d	P.D.	O.D.	D	F	E	
C-HTPA	K	14	H3M060	K	5	13.37	12.61	16	16	10	
			H3M090		5						
			H3M120		5						
			H3M150		5						
		15	15		H3M060						5
					H3M090						5
					H3M120						5
					H3M150						5
		16	16		H3M090						5
					H3M120						5 · 6.35
					H3M150						5
					H3M090						5
	18	18	H3M060	5 · 6							
			H3M090	5 · 6							
			H3M120	5 · 6							
			H3M150	5 · 6							
	20	20	H3M060	5 · 6							
			H3M090	5 · 6 · 6.35							
			H3M120	5 · 6							
			H3M150	5 · 6							
	22	22	H3M060	6 · 8							
			H3M090	6 · 8							
			H3M120	6 · 8							
			H3M150	6 · 8							

詳細販售型號及規格請以MISUMI官網為準。

型號生成方法

方法1 MISUMI官網搜尋
Type C-HTPA 於網頁搜尋生成訂購型號

方法2 步驟1 MISUMI官網搜尋 步驟2 經濟型品牌選定
關鍵字 皮帶輪 HTD 3M 於網頁搜尋生成訂購型號

MISUMI 經濟型