


# 拉料销

— 直杆・标准型 —

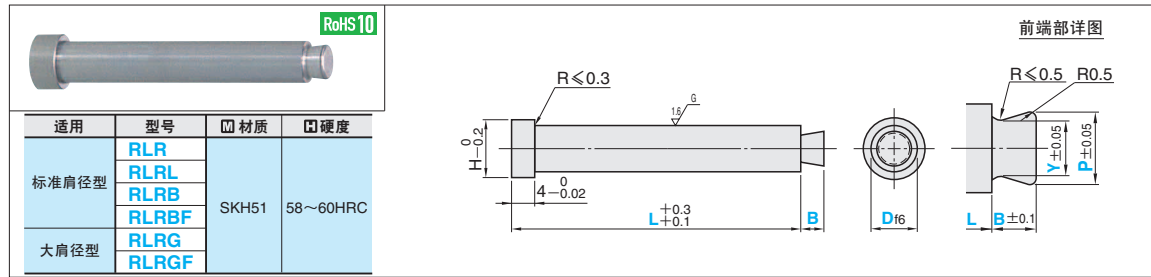

通用	型号	□材质	□硬度
标准肩径型	RLR	SKH51	58~60HRC
	RLRL		
	RLRB		
	RLRBF		
大肩径型	RLRG		
	RLRGF		

■L尺寸固定型

H	B	P	Y	Type	D	L									
4	2	1.5	1.0	RLR (标准肩径型)	2	15	20	25	30	35	40				
5		2.3	1.8		3	15	20	25	30	35	40	45	50		
6	2.5	2.8	2.3		4	20	25	30	35	40	45	50	60	70	80
7	3	3.3	2.8		5	20	25	30	35	40	45	50	60	70	80
8		3.8	3.0		6	30	35	40	45	50	60	70	80		
10	4	5.8	5.0		8	30	35	40	45	50	60	70	80		

■L尺寸指定型

H	B	P	Y	Type	D	L 指定单位0.1mm		
4	2	1.5	1.0	RLRL (标准肩径型)	2			
5		2.0	1.5		2.5	14.0~100.0		
6	2.5	2.8	1.8		3	14.0~100.0		
7	3	3.3	2.8		4	14.0~100.0		
8		3.8	3.0		5	19.0~100.0		
10	4	5.8	5.0		6	19.0~100.0		
					8	19.0~100.0		

■L・P・Y尺寸指定型

H	RLRB	RLRG	B	Type	D	L	指定单位0.1mm	
4	4	6	2	RLRB (标准肩径型)	2	14.0~100.0	P	Y
5	2.5				0.9~1.9		0.8~1.8	
6	3	0.9~2.4	0.8~2.3					
7	4	0.9~2.9	0.8~2.8					
8	5	1.1~3.9	1.0~3.8					
10	6	1.3~4.9	1.2~4.8					
13	8	1.6~5.9	1.5~5.8					
15	10	2.1~7.9	2.0~7.8					
		2.6~9.9	2.5~9.8					

■L・P・Y・B尺寸指定型

H	RLRBF	RLRGF	Type	D	L	指定单位0.1mm		
4	4	6	RLRBF (标准肩径型)	2	14.0~100.0	P	Y	B
5	2.5			0.9~1.9		0.8~1.8	0.8~3.0	
6	3	0.9~2.4		0.8~2.3		0.8~3.0		
7	4	0.9~2.9		0.8~2.8		0.8~3.0		
8	5	1.1~3.9		1.0~3.8		1.3~3.8		
10	6	1.3~4.9		1.2~4.8		1.5~4.5		
13	8	1.6~5.9		1.5~5.8		1.5~4.5		
15	10	2.1~7.9		2.0~7.8		2.0~6.0		
		2.6~9.9	2.5~9.8	2.5~7.5				

Order 订货范例: 型号 [RLR] [3] [P] [30]

Alterations 追加加工: 型号 [RLRGF] [4] [L] [37.5] [P] [2.8] [Y] [2.3] [B] [B3.0] (HC-TC-etc.)

Alterations	Code	Spec.
	HC	HC尺寸指定单位0.1mm ①D<HC<H ②RLR不适用
	TC	TC尺寸指定单位0.1mm ①2.0<TC<4 ②使用TC时L仍为指定尺寸 ③4-TC<Lmax.-L ④RLR不适用
	KC	加工单止转面 ①L<16不适用 ②RLR不适用
	TRN	加工装配工艺槽 (无需模板倒角) ③RLR不适用
	DR	D尺寸端部倒圆角R(R0.1~0.3) ①R形状为筒易加工, 非精确尺寸。 ②RLR不适用

Delivery 交货期: ①隔日上海・广州发货 ②P.41 (17:00前订购的库存品可当日发货。)  
③数量>31时, 请另询交货期。


•RLR 库存品 ③天发货  
④上海・广州发货  
⑤数量>31时, 请另询交货期。

•RLRL・RLRB・RLRG・RLRBF・RLRGF ③天发货  
④上海・广州发货  
⑤数量>31时, 请另询交货期。

Example 使用范例: P.707

# 拉料销

— 直杆・锁料型 —

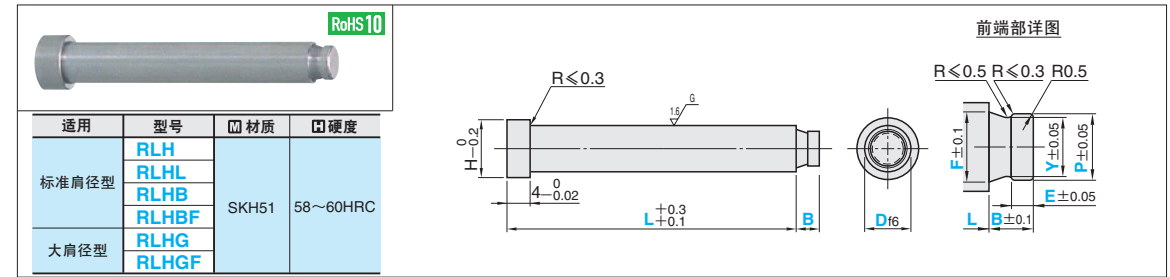

通用	型号	□材质	□硬度
标准肩径型	RLH	SKH51	58~60HRC
	RLHL		
	RLHB		
	RLHBF		
大肩径型	RLHG		
	RLHGF		

■L尺寸固定型

H	B	E	P	Y	F	Type	D	L												
4	2	1	1.5	1.0	1.7	RLH (标准肩径型)	2	15	20	25	30	35	40							
5							3	15	20	25	30	35	40	45	50					
6	2.5						2.8	2.3	3.0	4	20	25	30	35	40	45	50	60	70	80
7	3						3.3	2.8	3.5	5	20	25	30	35	40	45	50	60	70	80
8							3.8	3.0	4.0	6	30	35	40	45	50	60	70	80		
10	4						5.8	5.0	6.0	8	30	35	40	45	50	60	70	80		

■L尺寸指定型

H	B	E	P	Y	F	Type	D	L 指定单位0.1mm					
4	2	1	1.5	1.0	1.7	RLHL (标准肩径型)	2	14.0~100.0					
5							3	14.0~100.0					
6	2.5						2.8	2.3	3.0	4	14.0~100.0		
7	3						3.3	2.8	3.5	5	14.0~100.0		
8							3.8	3.0	4.0	6	19.0~100.0		
10	4						5.8	5.0	6.0	8	19.0~100.0		

■L・P・Y・F尺寸指定型

H	RLHB	RLHG	B	E	Type	D	L	指定单位0.1mm		F
4	4	6	2	1	RLHB (标准肩径型)	2	14.0~100.0	P	Y	Y<F<D
5	2.5					1.3~1.9		0.8~1.4		
6	3	1.3~2.9	0.8~2.4							
7	4	1.5~3.9	1.0~3.4							
8	5	1.7~4.9	1.2~4.4							
10	6	2.0~5.9	1.5~5.4							
13	8	2.5~7.9	2.0~7.4							
15	10	3.0~9.9	2.5~9.4							

■L・P・Y・F・B・E尺寸指定型

H	RLHBF	RLHGF	Type	D	L	指定单位0.1mm		B	E	B-Emin.
4	4	6	RLHBF (标准肩径型)	2	14.0~100.0	P	Y	Y<F<D	1.5~3.0	0.5~1.5
5	2.5			1.3~1.9		0.8~1.4				
6	3	1.3~2.9		0.8~2.4						
7	4	1.5~3.9		1.0~3.4						
8	5	1.7~4.9		1.2~4.4						
10	6	2.0~5.9		1.5~5.4						
13	8	2.5~7.9		2.0~7.4						
15	10	3.0~9.9		2.5~9.4						

Order 订货范例: 型号 [RLH] [6] [P] [70]

Alterations 追加加工: 型号 [RLHGF] [4] [L] [37.5] [P] [2.8] [Y] [2.3] [F] [3.0] [B] [B3.0] [E] [E1.0] (HC-TC-etc.)

Alterations	Code	Spec.
	HC	HC尺寸指定单位0.1mm ①D<HC<H ②RLH不适用
	TC	TC尺寸指定单位0.1mm ①2.0<TC<4 ②使用TC时L仍为指定尺寸 ③4-TC<Lmax.-L ④RLH不适用
	KC	加工单止转面 ①L<16不适用 ②RLH不适用
	TRN	加工装配工艺槽 (无需模板倒角) ③RLH不适用
	DR	D尺寸端部倒圆角R(R0.1~0.3) ①R形状为筒易加工, 非精确尺寸。 ②RLH不适用

Delivery 交货期: ①5天发货  
②上海・广州发货  
③数量>51时, 请另询交货期。

•RLH ⑤天发货  
④上海・广州发货  
⑤数量>51时, 请另询交货期。

•RLHL・RLHB・RLHG・RLHBF・RLHGF ⑦天发货  
④上海・广州发货  
⑤数量>51时, 请另询交货期。

Example 使用范例: P.707