

模架用导柱

ー长度加长指定型ー

RoHS 10


ー装卸型ー



ー压入型ー




MRP

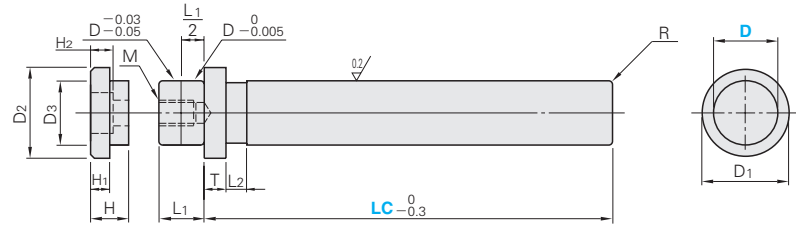


BRPM

(可动挡块STM用)

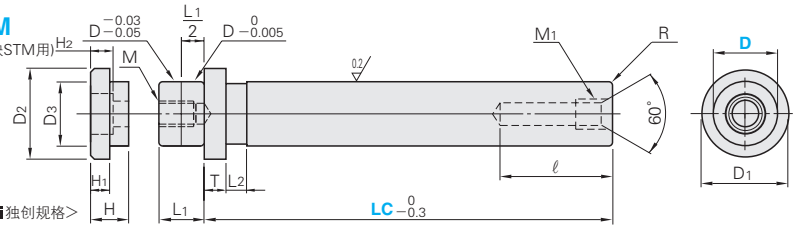


BRPK

(固定挡块STK用)

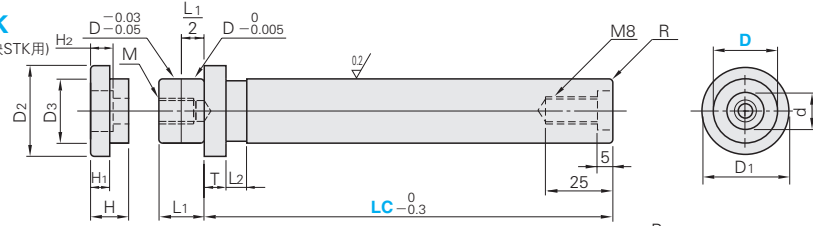


MSP

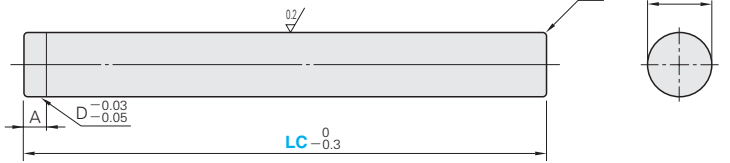


BSPM

(可动挡块STM用)

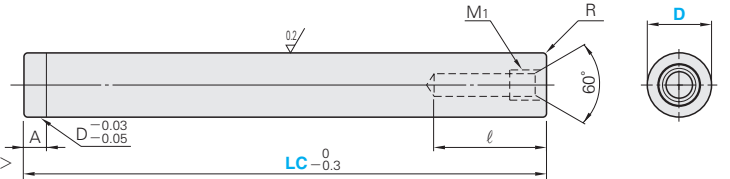

BSPK

(固定挡块STK用)

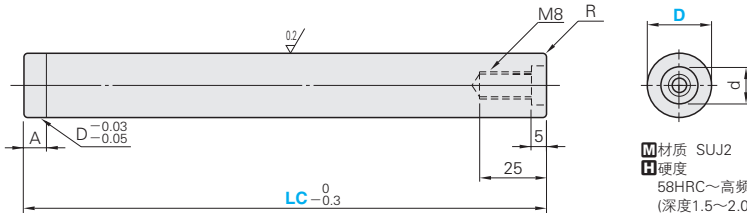

● 导柱采用高频淬火，中心无硬度，安装请勿使用硬物敲击。

■ 材质 SUJ2
■ 硬度 58HRC~高频淬火 (深度1.5~2.0mm)

D	D1	T	L1	L2	l	M1×P	d	A	M	R	D2	D3	H	H1	H2	■ 附属螺栓
20		29	5	15	38	M10×1.5	14	4	M 8×18	2.0	28	19.5	14	7	8.5	CB 8-25
22	+0.020 +0.015	31	8	16							42	30				
25		35		18	50	M12×1.5	5	M10×22	3.5	35	24.5	16	8	10.5	CB10-30	
28	+0.025 +0.020	39	10	20						50	36					27.5
32		44		23	60	M16×1.5	20	6	M12×27	4.0	40	31.5	18	10	12.5	CB12-35
38	+0.030 +0.025	53	12	27							60	49				
45		59		32	70	M14×31	7	M14×31	5.0	55	44.5	20	12	14.5	CB14-40	
50	+0.035 +0.030	69	15	35						70	62					49.5
60		79		42	70	72	59.5									

■ 装卸型

Catalog No.		指定单位1mm LC	
Type	D		
MRP	20	201 ~ 250	
	22	121 ~ 160	
		161 ~ 200	
		201 ~ 250	
	25	131 ~ 160	
		161 ~ 200	
		201 ~ 240	
	28	161 ~ 200	
		201 ~ 240	
	BRPM	32	161 ~ 200
			201 ~ 240
	BRPK	38	181 ~ 200
201 ~ 240			
MSP	20	181 ~ 200	
		201 ~ 240	
	22	181 ~ 200	
		201 ~ 240	
	25	181 ~ 200	
		201 ~ 240	
BSPM	28	201 ~ 240	
		241 ~ 300	
BSPK	32	241 ~ 300	
		301 ~ 350	
MSP	32	241 ~ 300	
		301 ~ 350	
	38	261 ~ 300	
		301 ~ 350	
	45	261 ~ 300	
		301 ~ 350	
50	261 ~ 300		
	301 ~ 350		
60	261 ~ 300		
		301 ~ 350	

Order 订货范例 Catalog No. - LC
BSPM 22 - LC205

Delivery 交货期 5 天发货
● 上海·广州发货
● 数量≥51时，请另询交货期。

■ 压入型

Catalog No.		指定单位1mm LC	
Type	D		
MSP	20	181 ~ 200	
		201 ~ 240	
	22	181 ~ 200	
		201 ~ 240	
	25	181 ~ 200	
		201 ~ 240	
	28	181 ~ 200	
		201 ~ 240	
	BSPM	32	241 ~ 300
			301 ~ 350
	BSPK	32	241 ~ 300
			301 ~ 350
MSP	38	261 ~ 300	
		301 ~ 350	
	45	261 ~ 300	
		301 ~ 350	
	50	261 ~ 300	
		301 ~ 350	
60	261 ~ 300		
		301 ~ 350	

模架用
导柱·导套