

Alterations 追加加工

型号 - L - P - W - N - 刻印文字(0~9,A~Z, / > < + - □ · ·) - (AKC · AWC...etc.)

ERVF3M 5 - 120.25 - P3.50 - W1.50 - N60 - MY3 - AWC 60


Alterations	Code	Spec.
	AKC	AKC角度指定单位1° ① 0 < AKC < 360 ② 同时使用KSA, WSA时,指定单位仅限90°
	AWC	AWC角度指定单位1° ① 0 < AWC < 360 ② 同时使用KSA, WSA时,指定单位仅限90°
	ARC	ARC角度指定单位1° ① 0 < ARC < 360 ② 同时使用KSA, WSA时,指定单位仅限90°
	ADC	ADC角度指定单位1° ① 0 < ADC < 360 ② 同时使用KSA, WSA时,指定单位仅限90°
	KGA	KGA角度指定单位1° ① 0 < KGA < 360
	KGD	KGD角度指定单位1° ① 0 < KGD < 360
	HC	HC尺寸指定单位0.1mm ① D+1 < HC < H
	HCC	HCC尺寸指定单位0.1mm ① D+1 < HCC < H-0.3

Alterations	Code	Spec.
	KSA	KSA尺寸指定单位0.1mm ① W/2+0.1 < KSA < D/2-0.1
	WSA	WSA尺寸指定单位0.1mm ① W/2+0.1 < WSA < D/2-0.1
	TC	TC尺寸指定单位0.1mm ① 2.0 < TC < 4且4-TC < Lmax.-L ② L, N为指定尺寸
	NHC	肩部端面编号刻印加工 [指定范围]·[指定方法] P.266
	NHN	肩部端面编号刻印加工(自动连号) [指定范围]·[指定方法] P.266
	CSW/CSF	对上表面2处进行C面避让加工(前端除外)。 [指定方法] CSW1-E25 CSW, CSF的选择范围 W CSW, CSF 1.0 < W < 1.5 0.3 W > 1.5 0.5 1 1.5
	CSF	对4处进行C面避让加工(前端除外)。 [指定方法] CSF0.5-E30 ① P > 1.5 ② CSW, CSF < W/2 E尺寸指定单位1mm ③ 5 < E < (L-N)-20

H	型号		L 指定单位0.01mm	P 指定单位0.01mm	W 指定单位0.01mm	K max.	N 指定单位1mm	Nmin.	刻印文字 (黑体)				
	Type	Character											
4	ERVF	1M	40.00~250.00	0.80~1.70	W > 1.25 × Q	1.9	10 < (L-N) < 200	23	0 1 2 3 4 5 6 7 8 9 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z				
5										2.5	0.80~2.20	2.4	26
6										3	1.00~2.70	2.9	27
7										3.5	1.00~3.20	3.4	29
8										4	1.00~3.70	3.9	
9										4.5	1.20~4.20	4.4	31
10		5	1.50~4.80	4.9									
11		6	1.80~5.30	5.4	33								
14		6.5	2.00~5.80	5.9									
15		7	2.00~6.30	6.4	40								
17		8	2.30~6.80	6.9									
		8.5	2.30~7.80	7.9									
		10	3.00~9.80	8.4									
		10.5	3.00~10.30	9.9									

请在Kmax.的范围内指定P·W尺寸。K = √(P²+W²) ① P ≥ W

精度标准

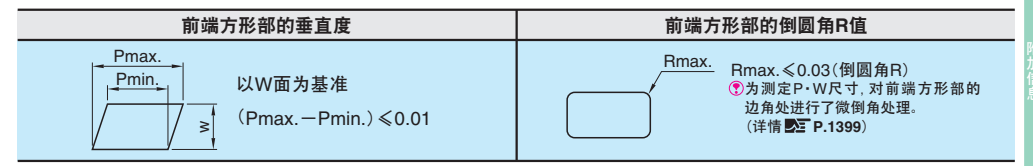

P尺寸和字数的限制、文字尺寸(Q, Z)

1M (1个字)			2M (2个字)			3M (3个字)		
P	Q	Z	P	Q	Z	P	Q	Z
0.80~0.99	0.6	0.3	2.30~2.99	1.0	1.3	3.10~4.49	1.0	2.1
1.00~1.29	0.8	0.4	3.00~3.99	1.5	2.0	4.50~5.49	1.5	3.2
1.30~1.49	1.0	0.5	4.00~4.99	2.0	2.6	5.50~6.99	2.0	4.2
1.50~1.99	1.2	0.6	5.00~5.99	2.5	3.3	7.00~10.30	2.5	5.3
2.00~2.49	1.5	0.8	6.00~7.99	3.0	3.9			
2.50~3.49	2.0	1.0	8.00~10.30	4.0	5.2			
3.50~4.49	3.0	1.5						
4.50~5.49	4.0	2.0						
5.50~10.30	5.0	2.5						

4M (4个字)			5M (5个字)		
P	Q	Z	P	Q	Z
3.90~5.49	1.0	2.9	5.00~6.99	1.0	3.7
5.50~6.99	1.5	4.4	7.00~10.30	1.5	5.6
7.00~10.30	2.0	5.8			

Order 订货范例

型号 - L - P - W - N - 刻印文字 (0~9, A~Z)

ERVF 3M 5 - 120.25 - P3.50 - W1.50 - N60 - MY3

Delivery 交货期

5 天发货

① 上海·广州发货
② 数量 > 101时, 请另询交货期。